

Model Number:

SVN-4K801B



Key Features


- > Support Ultra 265/H.265/H.264 video formats
- > 8-channel input
- > Support mainstream cameras of ONVIF conformance (Profile S, Profile G, Profile T) and RTSP protocols
- > Support 1-ch HDMI, 1-ch VGA, HDMI at up 4K(3840x2160) resolution
- > HDMI and VGA simultaneous output
- > Up to 8MP resolution recording
- > 1 SATA HDD up to 8TB

Specification


| | |
|---------------------------|--|
| Model | SVN-4K801B |
| Video/Audio Input | |
| IP Video Input | 8-ch |
| Network | |
| Incoming Bandwidth | 64Mbps |
| Outgoing Bandwidth | 48Mbps |
| Remote Users | 128 |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP, RTSP |
| Video/Audio Output | |
| HDMI/VGA Output | HDMI: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| | VGA: 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Audio Output | 1-ch, 3.5mm |
| Audio Compression | G.711A, G.711U |
| Synchronous Playback | 8-ch |
| Liveview display | 1/4/6/8/9 |
| Corridor Mode Screen | 3/4/5/7/9 |

| Snapshot | |
|---|---|
| FTP/Schedule/Event Snapshot | 1-ch snapshot, up to D1 resolution |
| Decoding | |
| Decoding format | Ultra 265/H.265/H.264 |
| Liveview/Playback | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Capability | 1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080p@30, 8 x 720p@30 |
| Hard Disk | |
| SATA | 1 SATA interface |
| Capacity | Up to 8TB for each disk (The maximum HDD capacity varies with environment temperature) |
| Smart | |
| VCA Detection by Camera | Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Audio Detection, Ultra Motion Detection(UMD) |
| VCA Search | Face Search, Behavior Search |
| Smart Intrusion Prevention (SIP), UMD by Camera | Total 4-ch |
| General Alarm | |
| General Alarm | Motion, Tampering, Human Body Detection, Video Loss, Alarm Input |
| Alert Alarm | IP Conflict, Network Disconnected, Disk Offline , Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal |
| External Interface | |
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface |
| USB Interface | Rear panel: 2 x USB2.0 |
| RS232 | NA |
| RS485 | NA |
| Alarm In | NA |
| Alarm Out | NA |
| General | |
| Power Supply | 12V DC Power Consumption: ≤5 W (without HDD) |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions (W×D×H) | 260mm × 240mm × 46mm (10.2"×9.4"×1.8 ") |
| Weight (without HDD) | ≤0.98kg (2. 16 lb) |
| Certification | |
| Certification | CE, FCC, UL, RoHS, WEEE |
| CE | EN 55032: 2015, EN 61000-3-3: 2013, EN IEC 61000-3-2: 2019, EN 55035: 2017 |
| FCC | Part15 Subpart B, ANSI C63.4 |

Dimensions:

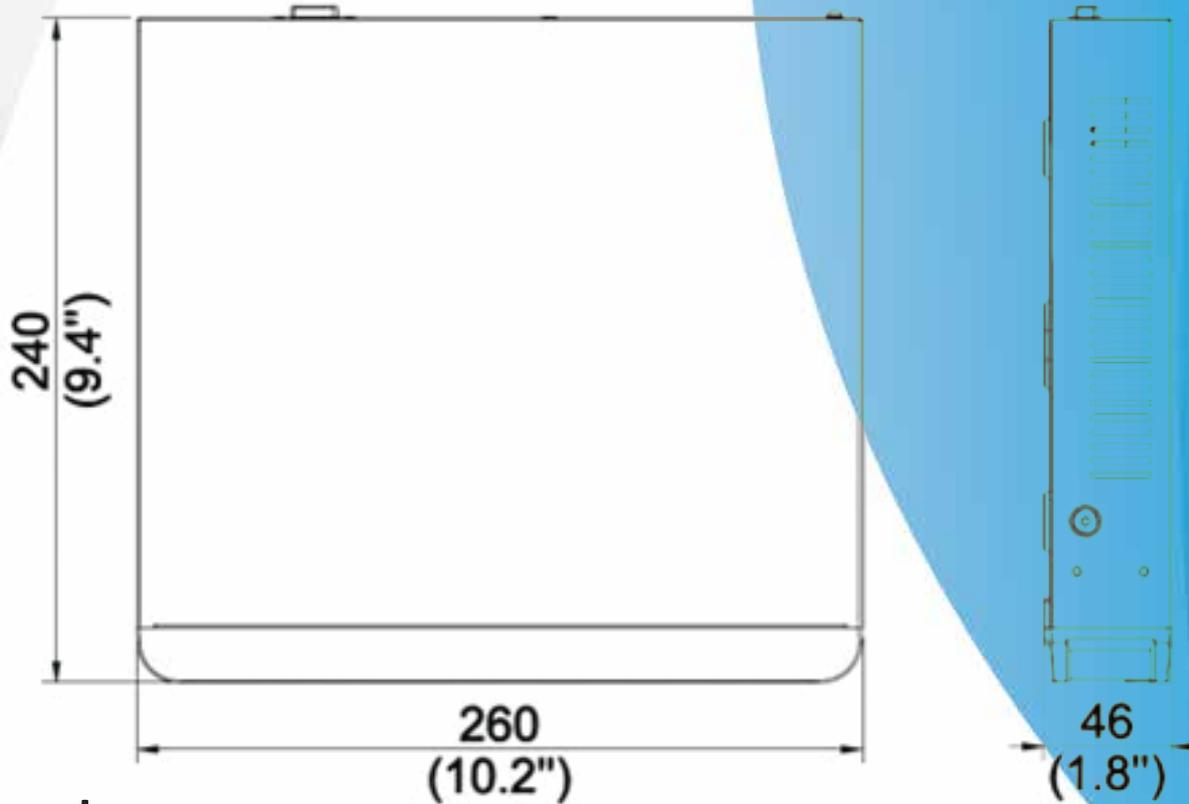

Rear Panel:

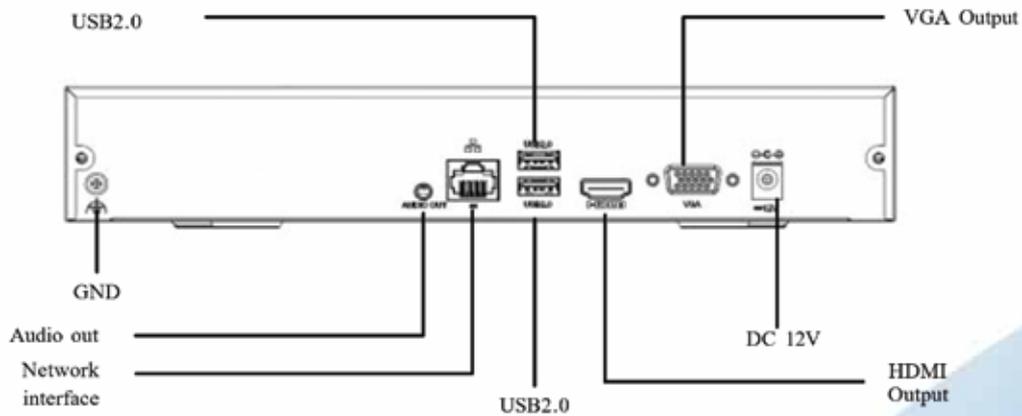

Website

www.starfoxsecu.com / www.secuview.com